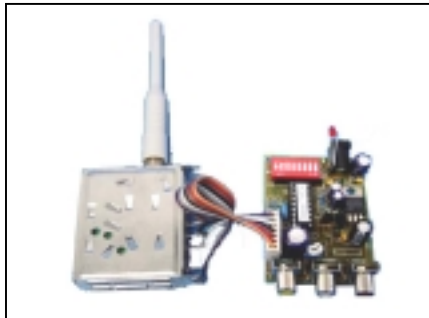


8 Channel 2.4 GHz Wireless A/V Transmitter & Receiver
ASK-2008T & ASK-2008R**Transmitter**
ASK-2008T**Receiver**
ASK-2008R**Features**

- 2.4 GHz, high power, industrial rated wireless kit. Output Power up to 1W optional.
- Convert existing covert wired system to wireless
- Small foot print for transmitter; easy to conceal
- Built-in switcher and auto-scan function for up to 8 channels.
- Compatible with all of MATCO's board, covert, and wall mount cameras
- Universal design for NTSC and PAL
- Up to 12 Channel available for special
- 1.7, 1.2 GHz systems available.

Specifications**Transmitter**

Frequency:	2300-2481 MHz
Power Output:	50 mW (+6dB) option
Modulation Method:	FM, PLL
Audio In:	18 KHz Stereo (2 Channel)
Video In:	NTSC/PAL, B/W & Color
Antenna:	3.25" Rubber Duck with SMA connector
Power Supply:	12-15 V/500 mA (#XF-201)
Dimensions:	2-1/4"L x 1-7/8"W x 5/8"H

Receiver

Audio Output:	RCA type 600Ω 1V p-p
Video Output:	RCA type 75Ω 1V p-p B/W or color
Channel Scan Rate:	1.5 seconds per channel fixed
Maximum Channels:	8
De-Modulation Method:	FM, PLL
Antenna:	3" Rubber Duck with SMA connector
Power Supply:	12-15V/500mA(#XF-201)
Dimensions:	5-3/4"L x 2-3/4"W x 3/4"H

Ordering information

- **UPS, FedEx Delivery**
- **Visa, Master, Discover cards accepted**
- **Call (847) 303-9700 for Distributor Program**

Web site: www.matco.com Email: Info@matco.com**Matco Inc. 2246 N. Palmer Dr., Suite 103, Schaumburg, IL 60173 Phone: (800) 719-9605, FAX: (847) 303-0660**
Matco Canada: 7455 Trans-Canada, St. Laurent, QC, H4T-1T3, Canada Sales: (877) 720-9222 Fax: (775) 659-6544